

 Ghisa EN-GJL-250

 Cast Iron EN-GJL-250


 Fonte EN-GJL-250

 Grauguss EN-GJL-250

 Hierro fundido EN-GJL-250

 Ferro fundido EN-GJL-250

Curva caratteristica - Performance curve - Courbe caractéristique
Kennlinie - Curva característica - Curva característica

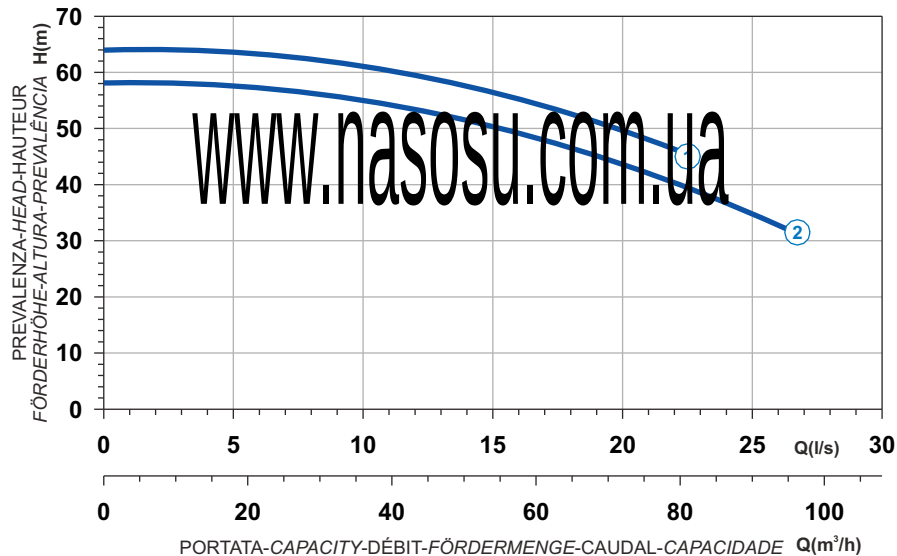

www.nasosu.com.ua



Curve N°	Code	Type	MOTOR			ATEX code 
			Nominal power P2 (kW)	Nominal current I (A)	Starting current Is (A)	
1	7008454	G216R6D1-L10AA2	22,4	40,1	237	-
2	7008502	G216R6D2-L10AA2	22,4	40,1	237	-

Power supply	3ph 400/690V 50Hz
R.P.M.	2850
Free passage (mm)	10
Discharge (mm)	DN 65
Weight (Kg)	300