



www.nasosu.com.ua



Ghisa EN-GJL-250



Fonte EN-GJL-250



Hierro fundido EN-GJL-250



Cast Iron EN-GJL-250




Grauguss EN-GJL-250



Ferro fundido EN-GJL-250

Curva caratteristica - Performance curve - Courbe caractéristique
Kennlinie - Curva característica - Curva característica

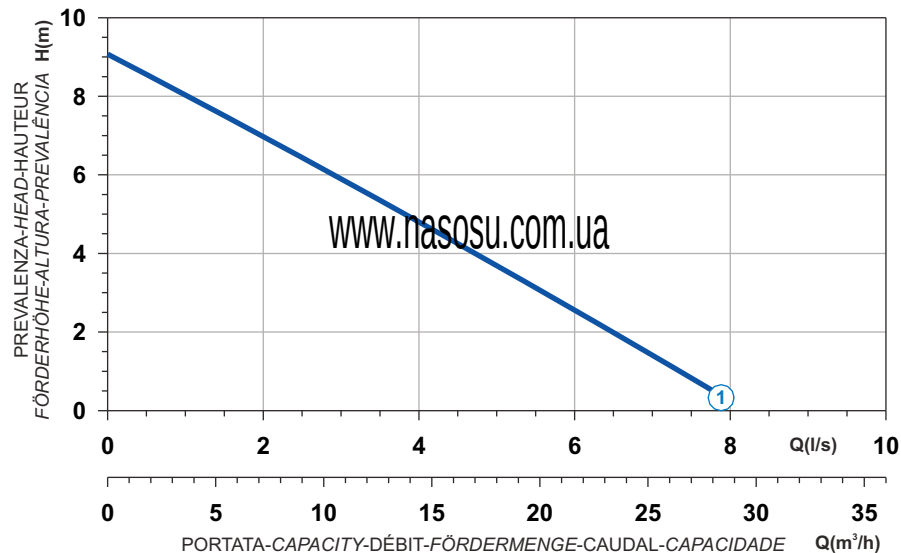

www.nasosu.com.ua

Power supply	1ph 230V 50Hz
R.P.M.	2850
Free passage (mm)	48
Discharge (mm)	DN 50
Weight (Kg)	31

Curve N°	Code	Type	MOTOR			ATEX code	
			Nominal power P2 (kW)	Nominal current I (A)	Starting current Is (A)		
1	7000814	G272M3V2-K48AB1	1,1	7,5	21	-	