


	Ghisa EN-GJL-250		Cast Iron EN-GJL-250
	Fonte EN-GJL-250		Grauguss EN-GJL-250
	Hierro fundido EN-GJL-250		Ferro fundido EN-GJL-250

Curva caratteristica - Performance curve - Courbe caractéristique
Kennlinie - Curva característica - Curva característica



www.nasosu.com.ua

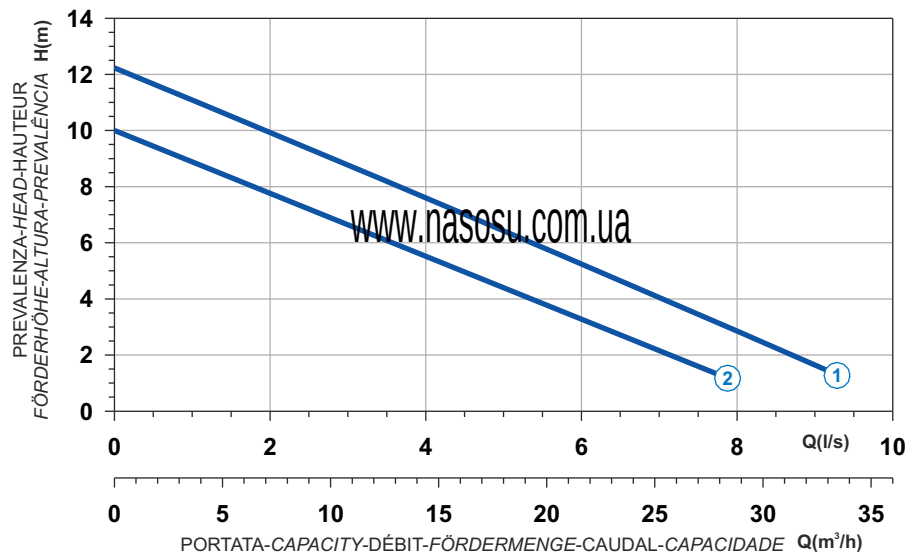

Curve N°	Code	Type	MOTOR			ATEX code 
			Nominal power P2 (kW)	Nominal current I (A)	Starting current Is (A)	
1	7000854	G272T3V1-K48AA0	1,4	3,0	8,4	-
2	7009010	G272T3V2-K48AA0	1,4	3,0	8,4	-

Power supply	3ph 400V 50Hz
R.P.M.	2850
Free passage (mm)	48
Discharge (mm)	DN 50
Weight (Kg)	31