




- Ghisa EN-GJL-250
- Fonte EN-GJL-250
- Hierro fundido EN-GJL-250

- Cast Iron EN-GJL-250
- Grauguss EN-GJL-250
- Ferro fundido EN-GJL-250

Curva caratteristica - Performance curve - Courbe caractéristique
Kennlinie - Curva característica - Curva característica

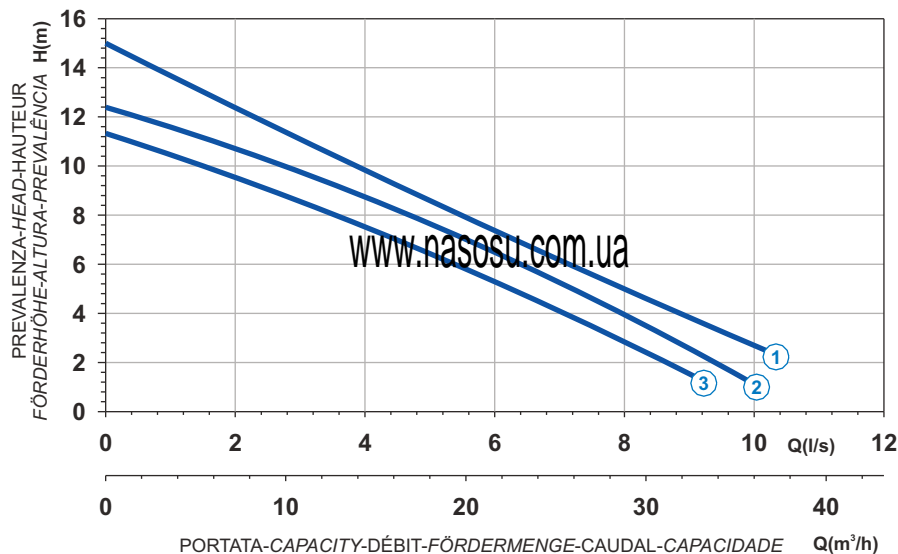

www.nasosu.com.ua

www.nasosu.com.ua

Power supply	1ph 230V 50Hz
R.P.M.	2850
Free passage (mm)	50
Discharge (mm)	DN 50
Weight (Kg)	43

Curve N°	Code	Type	MOTOR			ATEX code
			Nominal power P2 (kW)	Nominal current I (A)	Starting current Is (A)	
1	7005432	G271M3V1-K50AB1	1,8	10	35	7005618
2	7006436	G271M3V2-K50AB1	1,8	10	35	7006438
3	7006437	G271M3V3-K50AB1	1,1	7,5	21	7006443