



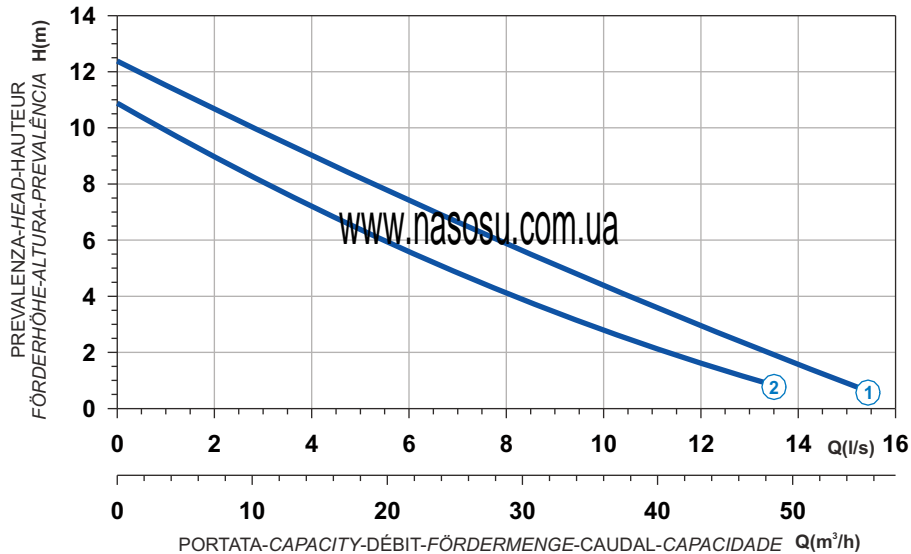

 Ghisa EN-GJL-250
 Fonte EN-GJL-250
 Hierro fundido EN-GJL-250

 Cast Iron EN-GJL-250
 Grauguss EN-GJL-250
 Ferro fundido EN-GJL-250

**Curva caratteristica - Performance curve - Courbe caractéristique
 Kennlinie - Curva característica - Curva característica**



Curve N°	Code	Type	MOTOR			ATEX code 
			Nominal power P2 (kW)	Nominal current I (A)	Starting current Is (A)	
1	7003121	G271T6V2-L65AA0	2,3	4,8	20,2	7000403
2	7000554	G271T6V3-L65AA0	2,3	4,8	20,2	7000839

Power supply	3ph 400V 50Hz
R.P.M.	2850
Free passage (mm)	65
Discharge (mm)	DN 65
Weight (Kg)	48