



www.nasosu.com.ua



Ghisa EN-GJL-250



Fonte EN-GJL-250



Hierro fundido EN-GJL-250



Cast Iron EN-GJL-250




Grauguss EN-GJL-250



Ferro fundido EN-GJL-250

Curva caratteristica - Performance curve - Courbe caractéristique
Kennlinie - Curva característica - Curva característica

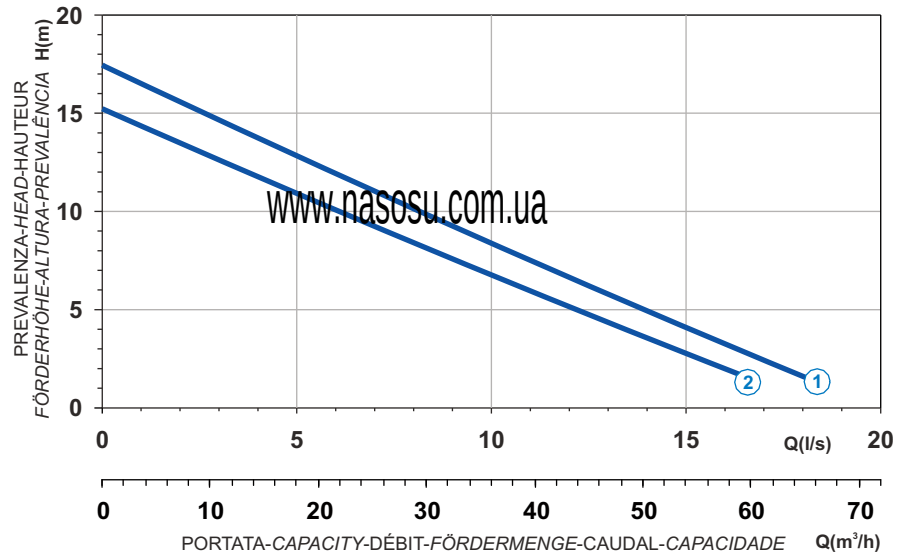

Power supply	3ph 400V 50Hz
R.P.M.	2850
Free passage (mm)	50
Discharge (mm)	DN 80
Weight (Kg)	60

Curve N°	Code	Type	MOTOR			ATEX code	
			Nominal power P2 (kW)	Nominal current I (A)	Starting current Is (A)		
1	7002496	G209T3V1-M50AA0	3,2	6,5	31,8	7002807	
2	7009360	G209T3V2-M50AA0	3,2	6,5	31,8	7008930	