



www.nasosu.com.ua



Ghisa EN-GJL-250



Fonte EN-GJL-250



Hierro fundido EN-GJL-250



Cast Iron EN-GJL-250




Grauguss EN-GJL-250




Ferro fundido EN-GJL-250

Curva caratteristica - Performance curve - Courbe caractéristique
Kennlinie - Curva característica - Curva característica

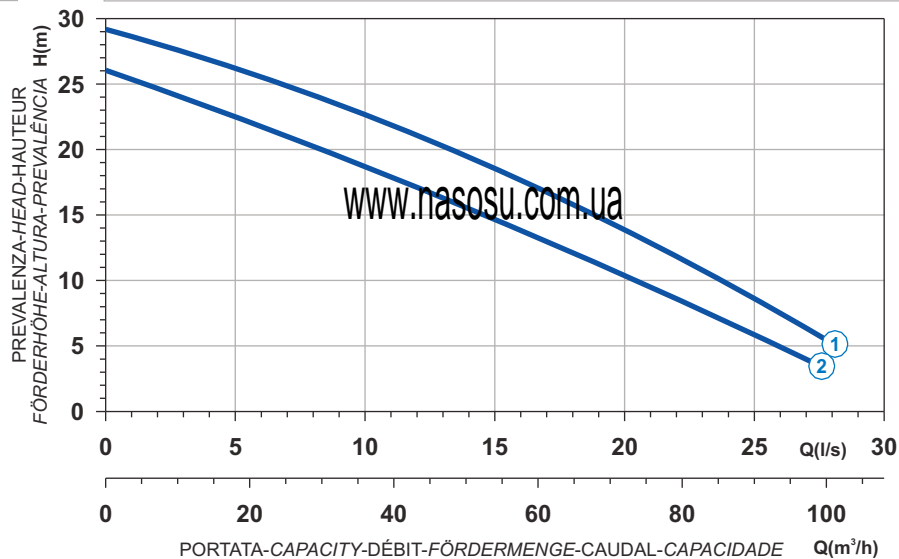

Power supply	3ph 400/690V 50Hz
R.P.M.	2850
Free passage (mm)	70
Discharge (mm)	DN 80
Weight (Kg)	160

Curve N°	Code	Type	MOTOR			ATEX code 
			Nominal power P2 (kW)	Nominal current I (A)	Starting current Is (A)	
1	7009668	G211R3V1-M70SA2	10	17,9	106	-
2	7003233	G211R3V2-M70SA2	10	17,9	106	-