










www.nasosu.com.ua


 Ghisa EN-GJL-250
 Fonte EN-GJL-250
 Hierro fundido EN-GJL-250

 Cast Iron EN-GJL-250
 Grauguss EN-GJL-250
 Ferro fundido EN-GJL-250

Curva caratteristica - Performance curve - Courbe caractéristique
Kennlinie - Curva característica - Curva característica

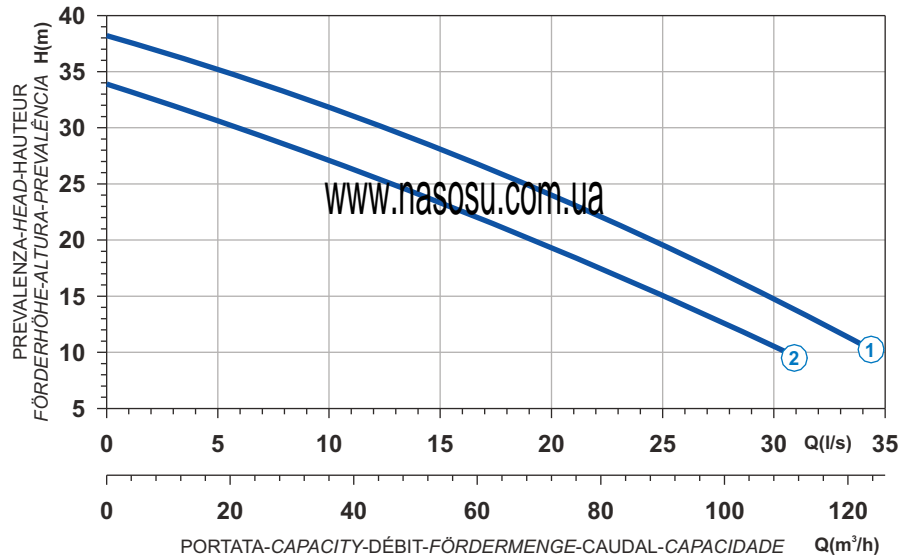

| | |
|-------------------|-------------------|
| Power supply | 3ph 400/690V 50Hz |
| R.P.M. | 2850 |
| Free passage (mm) | 80 |
| Discharge (mm) | DN 80 |
| Weight (Kg) | 190 |

| Curve N° | Code | Type | MOTOR | | | ATEX code  |
|----------|---------|-----------------|-----------------------|-----------------------|-------------------------|---|
| | | | Nominal power P2 (kW) | Nominal current I (A) | Starting current Is (A) | |
| 1 | 7006110 | G213R3V4-M80AA2 | 18,2 | 34 | 194 | 7007473 |
| 2 | 7006112 | G213R3V5-M80AA2 | 15,9 | 30 | 171 | 7007472 |