




www.nasosu.com.ua

 **Ghisa EN-GJL-250**
 **Fonte EN-GJL-250**
 **Hierro fundido EN-GJL-250**

 **Cast Iron EN-GJL-250**
 **Grauguss EN-GJL-250**
 **Ferro fundido EN-GJL-250**

Curva caracteristica - Performance curve - Courbe caractéristique
 Kennlinie - Curva caracteristica - Curva característica

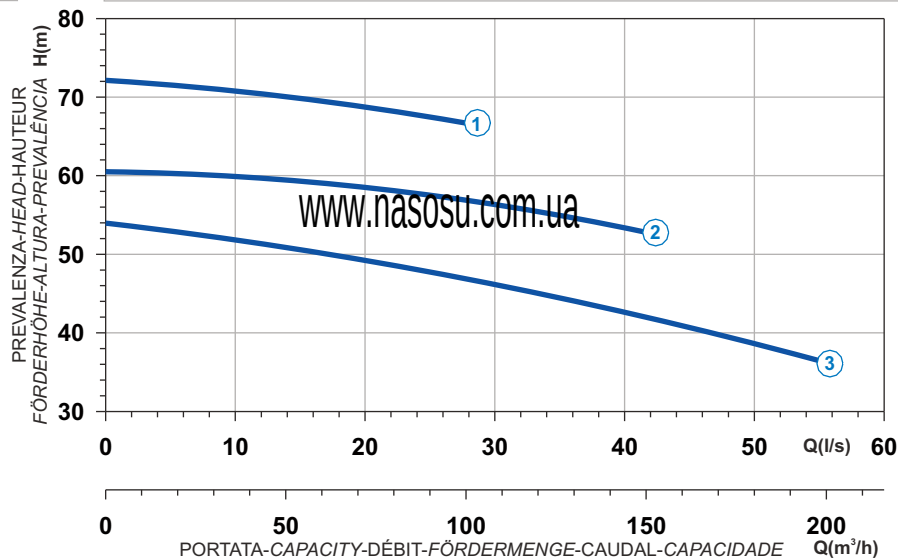

Power supply	3ph 400/690V 50Hz
R.P.M.	2850
Free passage (mm)	80
Discharge (mm)	DN 100
Weight (Kg)	410

Curve N°	Code	Type	MOTOR			ATEX code	
			Nominal power P2 (kW)	Nominal current I (A)	Starting current Is (A)		
1	7002380	G218R9V2-P80AA2	48,2	86,5	510	-	
2	7001837	G218R9V3-P80AA2	48,2	86,5	510	-	
3	7002628	G218R9V4-P80AA2	48,2	86,5	510	-	