
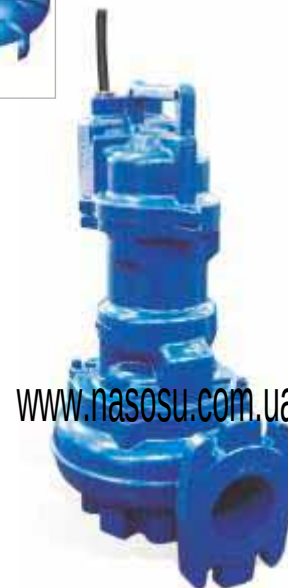


	Ghisa EN-GJL-250		Cast Iron EN-GJL-250
	Fonte EN-GJL-250		Grauguss EN-GJL-250
	Hierro fundido EN-GJL-250		Ferro fundido EN-GJL-250

Curva caratteristica - Performance curve - Courbe caractéristique
Kennlinie - Curva característica - Curva característica

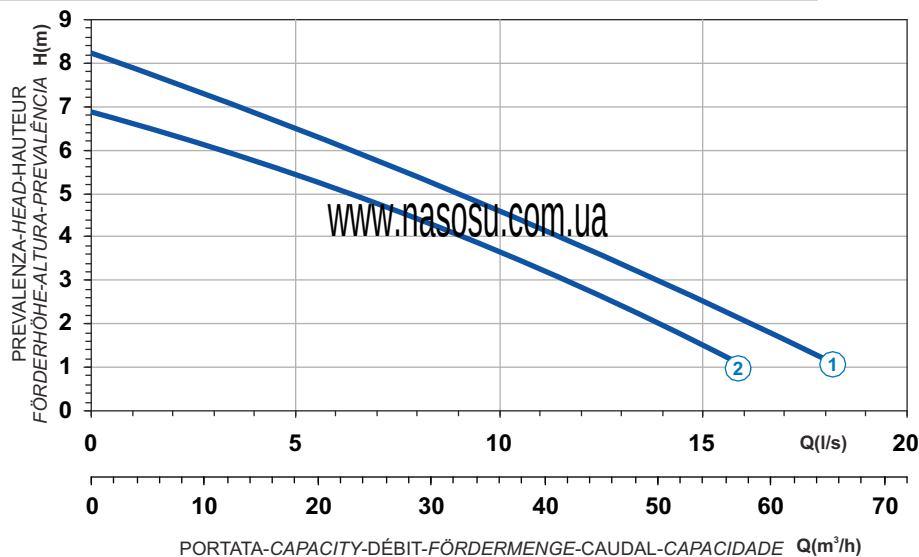

Curve N°	Code	Type	MOTOR			ATEX code	
			Nominal power P2 (kW)	Nominal current I (A)	Starting current Is (A)		
1	7005289	G471T6V1-M50AA0	1,3	3,5	16,1	7005836	
2	7005429	G471T6V2-M50AA0	1,3	3,5	16,1	7005648	

Power supply	3ph 400V 50Hz
R.P.M.	1450
Free passage (mm)	50
Discharge (mm)	DN 80
Weight (Kg)	45