



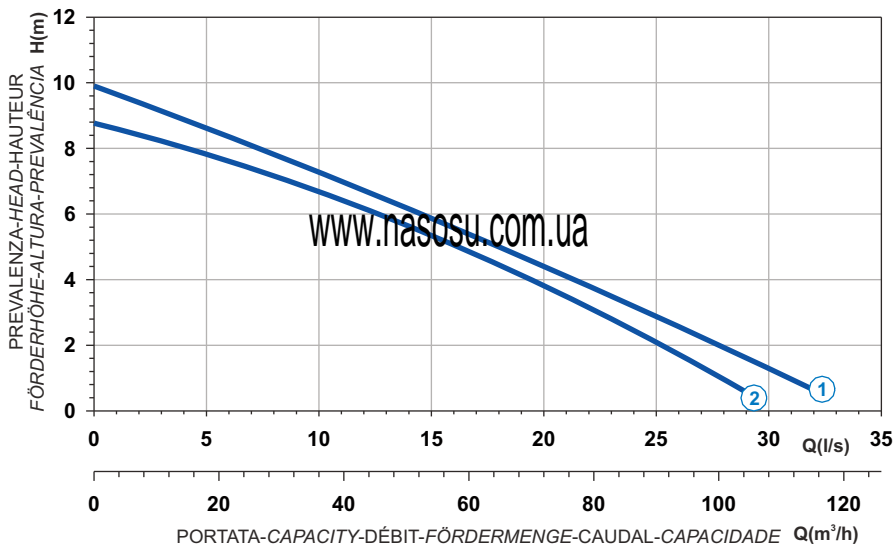

 Ghisa EN-GJL-250
 Fonte EN-GJL-250
 Hierro fundido EN-GJL-250

 Cast Iron EN-GJL-250
 Grauguss EN-GJL-250
 Ferro fundido EN-GJL-250

**Curva caratteristica - Performance curve - Courbe caractéristique
 Kennlinie - Curva característica - Curva característica**



| Curve N° | Code | Type | MOTOR | | | ATEX code  |
|----------|---------|-----------------|-----------------------|-----------------------|-------------------------|---------------------------------------------------------------------------------------------|
| | | | Nominal power P2 (kW) | Nominal current I (A) | Starting current Is (A) | |
| 1 | 7002013 | G409T6V1-M64AA0 | 2,8 | 6,5 | 29,2 | 7002794 |
| 2 | 7002018 | G409T6V2-M64AA0 | 2,8 | 6,5 | 29,2 | 7002796 |

| | |
|-------------------|---------------|
| Power supply | 3ph 400V 50Hz |
| R.P.M. | 1450 |
| Free passage (mm) | 64 |
| Discharge (mm) | DN 80 |
| Weight (Kg) | 64 |