



Ghisa EN-GJL-250



Fonte EN-GJL-250



Hierro fundido EN-GJL-250



Cast Iron EN-GJL-250




Grauguss EN-GJL-250



Ferro fundido EN-GJL-250

Curva caratteristica - Performance curve - Courbe caractéristique
Kennlinie - Curva característica - Curva característica

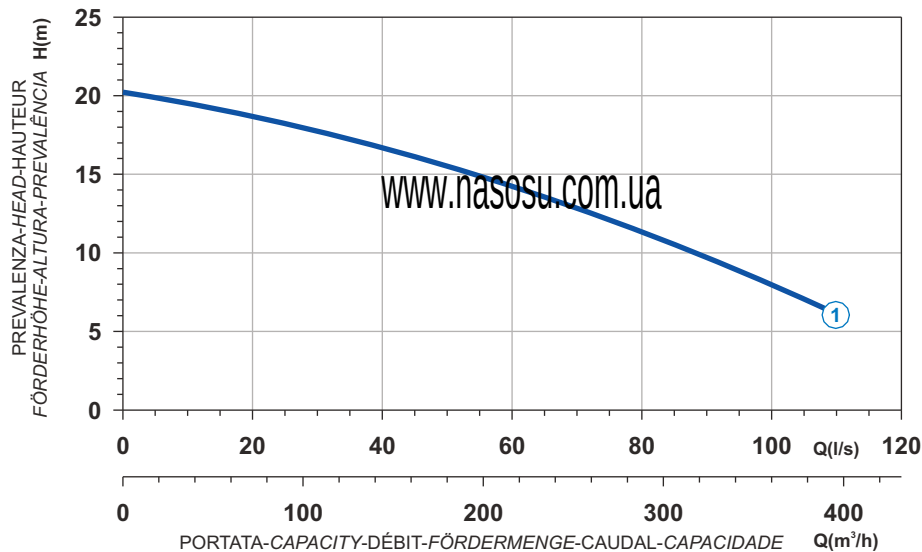

Power supply	3ph 400/690V 50Hz
R.P.M.	1450
Free passage (mm)	100
Discharge (mm)	DN 150
Weight (Kg)	355

Curve N°	Code	Type	MOTOR			ATEX code 
			Nominal power P2 (kW)	Nominal current I (A)	Starting current Is (A)	
1	7005168	G416R6V1-S100AA2	27	52,2	308	-