



www.nasosu.com.ua



Ghisa EN-GJL-250



Fonte EN-GJL-250



Hierro fundido EN-GJL-250



Cast Iron EN-GJL-250




Grauguss EN-GJL-250



Ferro fundido EN-GJL-250

Curva caratteristica - Performance curve - Courbe caractéristique
Kennlinie - Curva característica - Curva característica

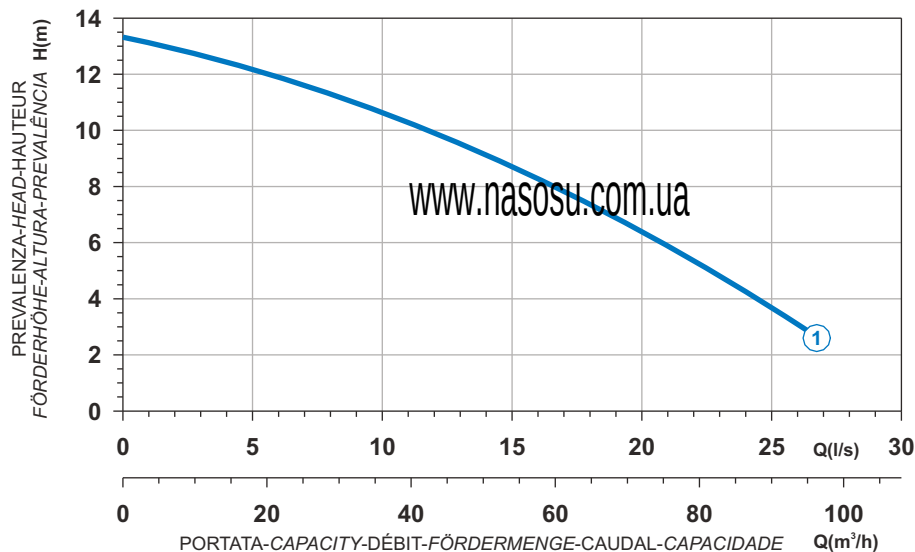

Power supply	3ph 400/690V 50Hz
R.P.M.	1450
Free passage (mm)	35
Discharge (mm)	DN 80
Weight (Kg)	160

Curve N°	Code	Type	MOTOR			ATEX code 
			Nominal power P2 (kW)	Nominal current I (A)	Starting current Is (A)	
1	7000382	G411R6S1-M35AA2	7,0	13,2	63,4	-