




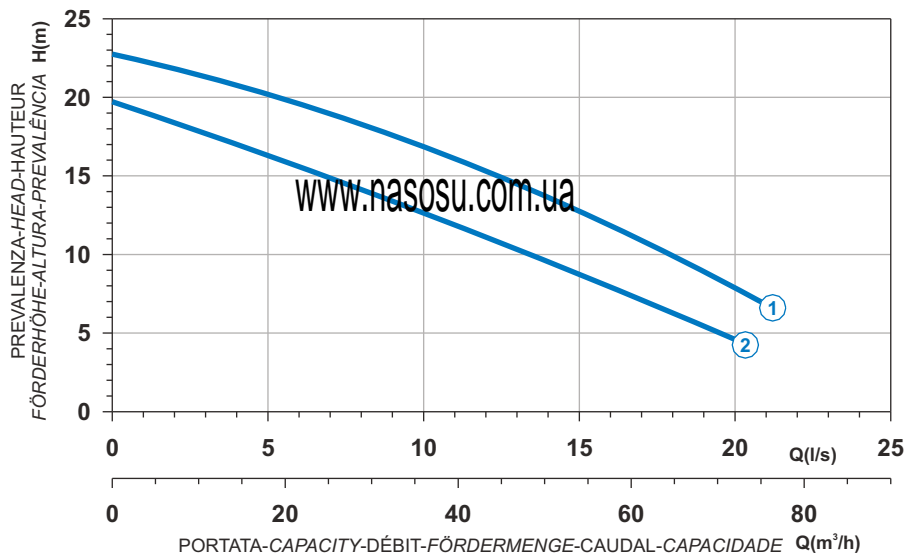

 Ghisa EN-GJL-250  
 Fonte EN-GJL-250  
 Hierro fundido EN-GJL-250

 Cast Iron EN-GJL-250  
 Grauguss EN-GJL-250  
 Ferro fundido EN-GJL-250

Curva caratteristica - Performance curve - Courbe caractéristique  
 Kennlinie - Curva característica - Curva característica



Curve N°	Code	Type	MOTOR			ATEX code 
			Nominal power P2 (kW)	Nominal current I (A)	Starting current Is (A)	
1	7001190	G211R3S1-M35AA2	8,2	15,5	91,5	-
2	7004331	G211R3S2-M35AA2	8,2	15,5	91,5	-

Power supply	3ph 400/690V 50Hz
R.P.M.	2850
Free passage (mm)	35
Discharge (mm)	DN 80
Weight (Kg)	150