


	Ghisa EN-GJL-250		Cast Iron EN-GJL-250
	Fonte EN-GJL-250		Grauguss EN-GJL-250
	Hierro fundido EN-GJL-250		Ferro fundido EN-GJL-250

**Curva caratteristica - Performance curve - Courbe caractéristique
Kennlinie - Curva característica - Curva característica**



www.nasosu.com.ua

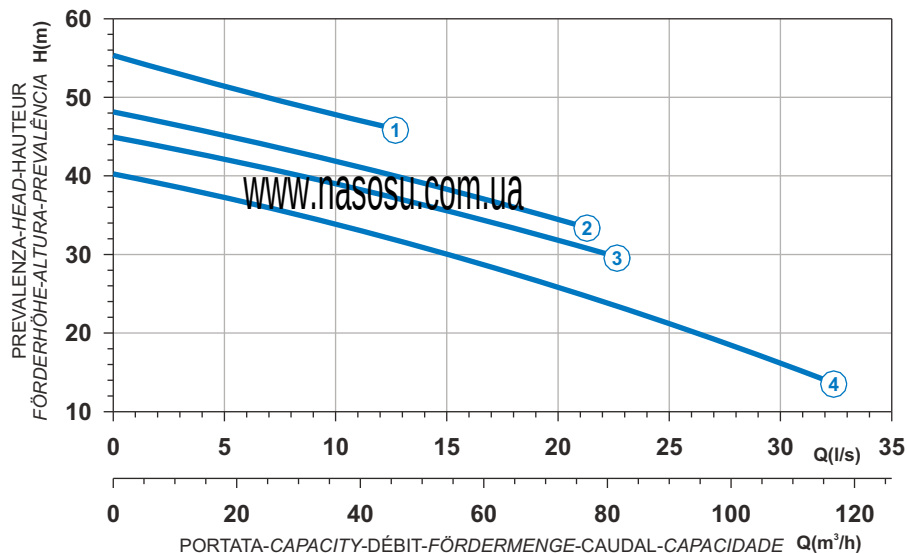

Curve N°	Code	Type	MOTOR			ATEX code 
			Nominal power P2 (kW)	Nominal current I (A)	Starting current Is (A)	
1	7000728	G213R6S1-M35AA2	18,2	34	194	-
2	7001262	G213R6S2-M35AA2	18,2	34	194	-
3	7001283	G213R6S3-M35AA2	18,2	34	194	-
4	7001226	G213R6S4-M35AA2	18,2	34	194	-

Power supply	3ph 400/690V 50Hz
R.P.M.	2850
Free passage (mm)	35
Discharge (mm)	DN 80
Weight (Kg)	191