




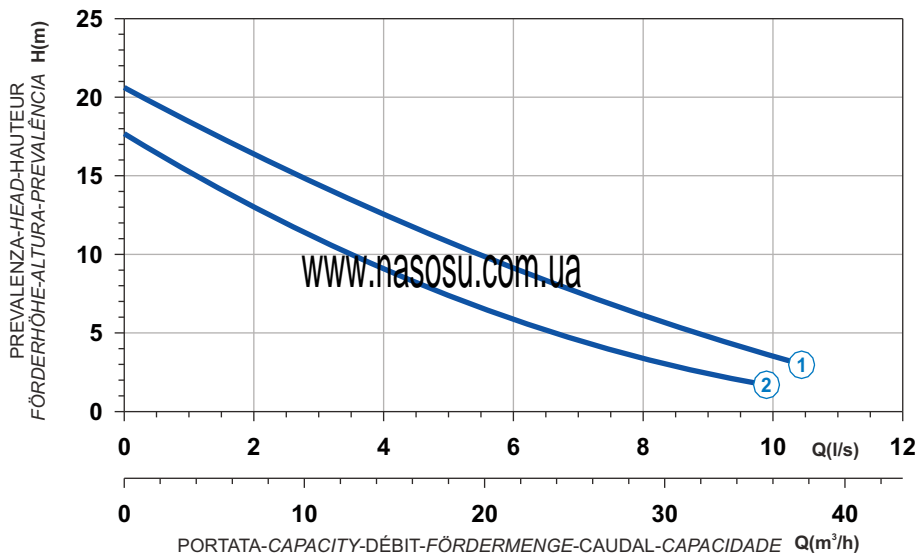

 Ghisa EN-GJL-250  
 Fonte EN-GJL-250  
 Hierro fundido EN-GJL-250

 Cast Iron EN-GJL-250  
 Grauguss EN-GJL-250  
 Ferro fundido EN-GJL-250

**Curva caratteristica - Performance curve - Courbe caractéristique  
 Kennlinie - Curva característica - Curva característica**



Curve N°	Code	Type	MOTOR			ATEX code 
			Nominal power P2 (kW)	Nominal current I (A)	Starting current Is (A)	
1	7000602	<b>G272T1M1-K30AA0</b>	1,4	3,0	8,4	-
2	7009016	<b>G272T1M2-K30AA0</b>	1,4	3,0	8,4	-

Power supply	3ph 400V 50Hz
R.P.M.	2850
Free passage (mm)	30
Discharge (mm)	DN 50
Weight (Kg)	31