




www.nasosu.com.ua

 Ghisa EN-GJL-250
 Fonte EN-GJL-250
 Hierro fundido EN-GJL-250

 Cast Iron EN-GJL-250
 Grauguss EN-GJL-250
 Ferro fundido EN-GJL-250

Curva caratteristica - Performance curve - Courbe caractéristique
 Kennlinie - Curva característica - Curva característica

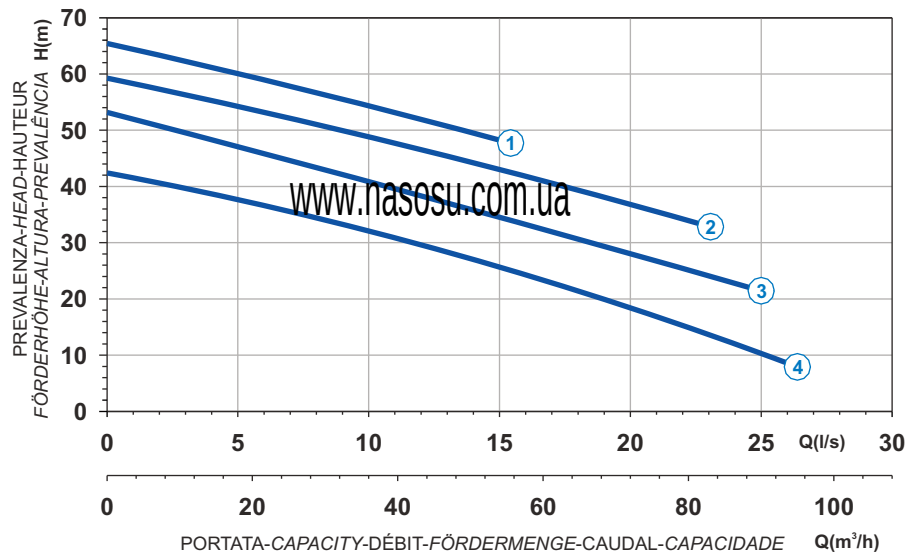

Power supply	3ph 400/690V 50Hz
R.P.M.	2850
Free passage (mm)	40
Discharge (mm)	DN 80
Weight (Kg)	190

Curve N°	Code	Type	MOTOR			ATEX code	
			Nominal power P2 (kW)	Nominal current I (A)	Starting current Is (A)		
1	7001170	G213R1M1-M40AA2	18,2	34	194	7007466	
2	7009292	G213R1M5-M40AA2	18,2	34	194	7007468	
3	7008358	G213R1M2-M40AA2	13,8	29,5	174	7007465	
4	7009030	G213R1M3-M40AA2	13,8	29,5	174	7007467	